

# EXSTREAMER



## EXSTREAMER 110

**Network audio decoder for commercial, professional and broadcast applications**

**Barix AG**  
Seefeldstrasse 303  
CH-8008 Zürich  
Switzerland

**T +41 43 433 22 11**  
**F +41 44 274 28 49**

**Barix Technology Inc.**  
2182 Helena Road  
St. Paul, MN 55128  
USA

**T (866) 815-0866**  
**F (209) 755-8435**

[www.barix.com](http://www.barix.com)  
[info@barix.com](mailto:info@barix.com)



Decodes MP3 and PCM streams (http, UDP,RTP) from PC, web, Shoutcast, Icecast and RTP servers with automatic failover and USB playback

Plays WMA and MP3 files from server, or local memory stick

Backlit LCD with 32 characters showing status and metadata information

10/100 Mbit Ethernet connection

Configuration & control via web browser, IR remote control, Ethernet API (CGI)

# EXSTREAMER

## Technical Specifications

### Audio Formats:

MP3 up to 320 kBit fixed & variable bit rates, WMA, G.711 (uLaw/aLaw @ 8 or 24 kHz) and PCM (16bit @ 8, 24, 44.1 or 48 kHz)

### Audio Interfaces:

Stereo RCA, 3.5 mm Headphone Jack, both 4Vpp max (8Vpp in bridge output mode), bass and treble adjustable by browser

### Network Interface:

RJ45 10/100 Mbit Ethernet (Auto), TCP/IP, UDP, RTP, DHCP, SNMP, AutoIP, SonicIP, IPzator

### Control Interfaces:

IR Remote control, 2 x 16 char LCD (backlit) RS-232 DSub 9pin male, 300..115200 Baud 1 relay (NO) 24V 0.5 A on RS-232 connector

### Misc:

Reset/channel selection/factory default button USB1.1 interface for memory use (up to 4GB, FAT12 or FAT 16 formatted)

### Power requirements:

9 to 30VDC / 12 to 24VAC, 6 Watt max. power supply included (250g)

### Case:

Aluminium, 250g, 108mm x 38mm x 78.7mm (4.25" x 1.5" x 3.1")

### Operating temperature / humidity:

0 - 40°Celsius / 32 - 104 Deg. Fahrenheit  
0-70% relative humidity, noncondensing

### Certifications:

FCC B, CE B, RoHS compliant (lead free)

### User Interface:

LCD, IR Remote control, Ethernet control API (CGI) for automation systems, integrated web server for control and configuration


Do you want to play music throughout your hotel, or have your own brand radio station playing throughout your chain?

The Barix Exstreamer 110 is a versatile network audio player, designed for applications in the Hotel and Hospitality sector. Flexible, low-cost and discrete, these Barix devices can be used to deliver a sophisticated distributed audio solution without the need for a PC.

With the standard application, the Exstreamer 110's display shows the track, or radio channel information extracted from the metadata.

The device can be controlled using the included remote control, by web browser through it's built-in web UI, or by Ethernet APIs.

The Exstreamer 110 can play MP3, WMA, G.711 and PCM audio files from a PC, or web server, as well as streams from sources such as Shoutcast, Icecast (Internet radio) and from RTP servers such as the Barix Instreamer 100. If the primary network stream fails, the Exstreamer 110 can automatically failover to playing from a backup stream and, in the event that this stream fails as well, the Exstreamer 110 can automatically start playing files from a local USB stick. All the time that the Exstreamer 110 is in the failover state, it will continually try to reconnect to the primary source.

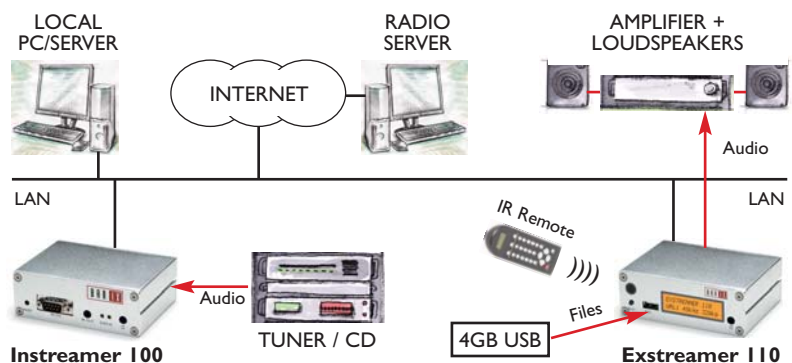

## Common Applications

- Streaming internet radio in bars and clubs
- Providing radio channels in hotel rooms
- As a playback point in an IP PA system
- Instore audio distribution
- Playing audio from a PC, a jukebox application, or from flash memory
- Commercial audio streaming applications

The Exstreamer 110 also has a relay output, making control of an external device possible. Like all Barix products, the Exstreamer 110 is user programmable via our ABCL platform, which enables the unit's operation to be modified to fit non-standard requirements.

For further information about this and other Barix products, please visit [www.barix.com](http://www.barix.com)